




## UC1200 HS23 Cat.7+

### S/FTP

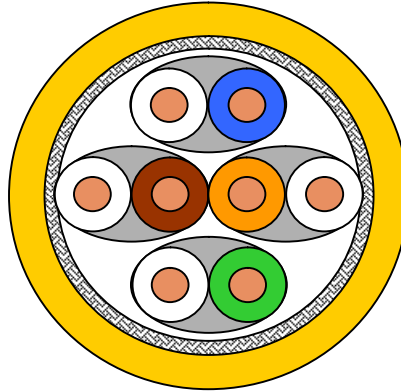

### Application

Primary (Campus), Secondary (Riser), Tertiary (Horizontal)  
IEEE 802.5; IEEE 802.3: 10Base-T; 100Base-T; 1000Base-T; 10GBase-T  
ISDN; TPDDI; ATM, CATV, Broadband Video, SOHO-Cabling

### Standards

EN 50173-1; EN 50288-4-1  
ISO/IEC 11801;  
IEC 61156-5

### Flame resistance

LSHF(LSOH): IEC 60332-1; IEC 60754-2; IEC 61034

### Construction

Conductor	bare copper wire Ø 0.57 mm (AWG 23)
Insulation	Foamskin Polyethylene, Ø 1.4 mm
Twisting	2 cores to the pair
Pair screen	Al-laminated plastic foil
Cable lay up	4 pairs to the core
Screen	Copper braid, tinned
Sheath	LSHF, melon yellow RAL 1028



## UC1200 HS23 Cat.7+

### Mechanical properties

Bending radius	without load	≥ 35 mm
	with load	≥ 70 mm
Temperature range	during operation	-20°C to + 60°C
	during installation	0°C to + 50°C

### Electrical properties

at 20°C ± 5°C

Loop resistance		≤ 135 Ω/km
Resistance unbalance		≤ 2%
Insulation resistance	(500 V)	≥ 2000 MΩ*km
Mutual capacitance	at 800 Hz	Nom. 43 nF/km
Capacitance unbalance	(pair/ground)	≤ 1500 pF/km
Characteristic impedance	(1-100 MHz)	(100 ± 15) Ω
Nominal velocity of propagation		ca. 79 %
Propagation delay		≤ 427 ns/100m
Delay skew		≤ 12 ns/100m
Test voltage	(DC, 1 min) core/core and core/screen	1000 V
Transfer impedance	at 1 MHz	≤ 20 mΩ/m
	at 10 MHz	≤ 30 mΩ/m
	at 30 MHz	≤ 40 mΩ/m
	at 100 MHz	≤ 200 mΩ/m
Coupling attenuation		≥ 75 dB

### Electrical data (nominal)

acc. to Cat.7 (at 20°C)

F (MHz)	Attenuation (dB/100m)	NEXT (dB)	PS-NEXT (dB)	ACR (dB/100m)	PS-ACR (dB/100m)	ELFEXT (dB/100m)	PS-ELFEXT (dB/100m)	Return loss (dB)
1,0	1,8	100	97	98	95	105	103	20
4,0	3,4	100	97	97	94	93	91	23
10,0	5,4	100	97	95	92	85	83	25
16,0	6,8	100	97	93	90	81	79	25
20,0	7,7	100	97	92	89	79	77	25
31,2	9,6	100	97	90	87	75	73	24
62,5	13,7	100	97	86	83	69	67	22
100,0	17,4	100	97	83	80	65	63	20
125,0	18,6	95	92	76	73	63	61	19
155,5	19,5	95	92	75	69	61	59	19
175,0	22,1	92	89	70	67	60	58	18
200,0	25,0	92	89	67	64	59	57	18
250,0	28,1	90	87	62	59	57	55	17
300,0	30,9	89	86	58	55	55	53	17
450,0	37,4	87	84	50	47	52	50	17
600,0	44,8	85	82	40	37	49	47	17
1000,0	58,4	82	79	24	21	45	43	



## UC1200 HS23 Cat.7+

1200,0	65,2	82	79	17	17	43	41	
--------	------	----	----	----	----	----	----	--



## UC1200 HS23 Cat.7+

### Technical data

Product code	Cable type	Brand name	Outer diameter	Fire load		Weight kg/km	Copper content	Tensile force N
			mm	MJ/km	kWh/m			
1000672	J-02YSCH 4x2x0.57 PiMF	UC1200 HS23Cat.7+ S/FTP 4P LSHF	7.5	642	0.178	66	28	110